

HOOD oval and round ports, aesthetics combined with unsurpassed strength



Weather-tough stainless steel combined with impact-resistant tempered glass to create a strong, durable, and low-maintenance portlight that makes a classic statement.


FEATURES

- CE approved ISO/DIS 12216
- 316 stainless steel machined rolled frames.
- Cast 316 stainless steel hinges with set screw to adjust gasket pressure.
- Weather resistant gasket.
- High Strength tempered glass.
- Custom size portholes are available,
- Standard fiberglass screens

Ports TRADITIONAL Oval & Round

OVAL OPENING PORTS / ANGLED AND STRAIGHT SPIGOT

Model No.	A x B Model	C x D Cutout Size	E x F Over All Size	R	R1	Glass Thickness
H6548-0512-XXX	5x12 - 127X305	5 1/4x12 1/8 - 133 x 307	7 3/8 x 14 1/4 - 187 x 362	2 5/8 - 67	3 7/8 - 98	5/16" - 8mm
H6548-0714-XXX	7x14 - 178X356	7 1/4x14 1/4 - 184 x 362	7 3/8 x 14 1/4 - 187 x 362	3 5/8 - 92	4 7/8 - 124	5/16" - 8mm
H6548-0716-XXX	7x16 - 178X406	7 1/4x16 1/4 - 184 x 413	9 3/8 x 16 3/8 - 238 x 416	3 5/8 - 92	4 7/8 - 124	5/16" - 8mm
H6548-0718-XXX	7x18 - 178X457	7 1/4x18 1/4 - 184 x 464	9 3/8 x 16 3/8 - 238 x 416	3 5/8 - 92	4 7/8 - 124	5/16" - 8mm
H6548-0816-XXX	8x16 - 203X406	8 1/4x16 1/4 - 210 x 413	9 3/8 x 18 3/8 - 238 x 467	4 1/8 - 104	5 3/8 - 137	5/16" - 8mm
H6548-0818-XXX	8x18 - 203X457	8 1/4x18 1/4 - 210 x 464	9 3/8 x 18 3/8 - 238 x 467	4 1/8 - 104	5 3/8 - 137	5/16" - 8mm
H6548-1020-XXX	10x20 - 254X508	10 3/8x20 3/8 - 262 x 516	10 3/8 x 20 3/8 - 263 x 518	5 1/8 - 131	6 3/8 - 164	3/8" - 10mm
H6548-1024-XXX	10x24 - 254X609	10 3/8x24 3/8 - 262 x 617	10 3/8 x 20 3/8 - 263 x 518	5 1/8 - 131	6 3/8 - 164	3/8" - 10mm
H6548-1224-XXX	12x24 - 305X609	12 3/8x24 3/8 - 311 x 617	10 3/8 x 20 3/8 - 263 x 518	6 1/8 - 157	7 3/8 - 190	3/8" - 10mm
H6548-1229-XXX	12x29 - 305X710	12 3/8x28 3/8 - 311 x 718	10 3/8 x 20 3/8 - 263 x 518	6 1/8 - 157	7 3/8 - 190	3/8" - 10mm

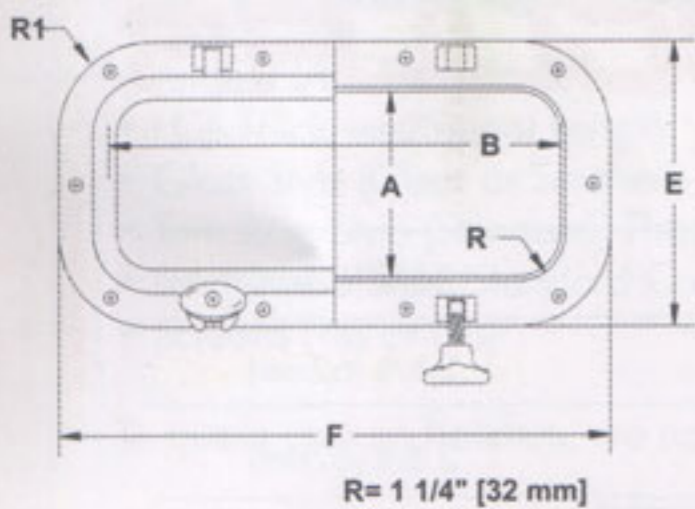

XXX= Specify spigot length. Example 1-1/2" spigot is = 150, • 2" spigot = 200
A/S= Specify angled or straight spigot
Spigot lengths available from 0" to 4"
Storm covers available • Gas arms are available

ROUND OPENING PORTS

Model No.	A Model	C Cutout Size	E Over All	Glass Thickness
H6551-0700-XXX	LSR0700	7 1/4" - 184mm	9 5/8" - 244mm	5/16" - 8mm
H6551-0800-XXX	LSR0800	8 1/4" - 210mm	10 5/8" - 269mm	5/16" - 8mm
H6551-1000-XXX	LSR01000	10 3/8" - 262mm	12 7/8" - 327mm	5/16" - 8mm
H6551-1200-XXX	LSR01200	12 3/8" - 311mm	14 7/8" - 378mm	5/16" - 8mm
H6551-1400-XXX	LSR01400	14 3/8" - 362mm	16 7/8" - 429mm	3/8" - 10mm

XXX= Specify spigot length. Example 1 1/2" spigot is = 150, • 2" spigot = 200
Spigot lengths available from 0" to 4"
Storm cover available • Gas arms are available

Photo credits: Helsen Signature 47
Specifications subject to change without notice