



Classic styling crafted to last a lifetime

Crafted from 316 non-magnetic stainless steel and 1/2" acrylic, this CE-approved hatch leads the way in traditionally designed square hatches. It is rugged, watertight, and designed for years of trouble-free operation.



FEATURES

- Hand and electro-polished 3/16" non-magnetic stainless steel.
- Injection molded glass filled nylon screw-type closure dogs.
- Oil resistant neoprene gaskets.
- Adjustable hinges for precise pressure against gasket.
- Scratch resistant, smoked acrylic lens.
- GASKET NO.HX-Hatchgasket
- CE approved

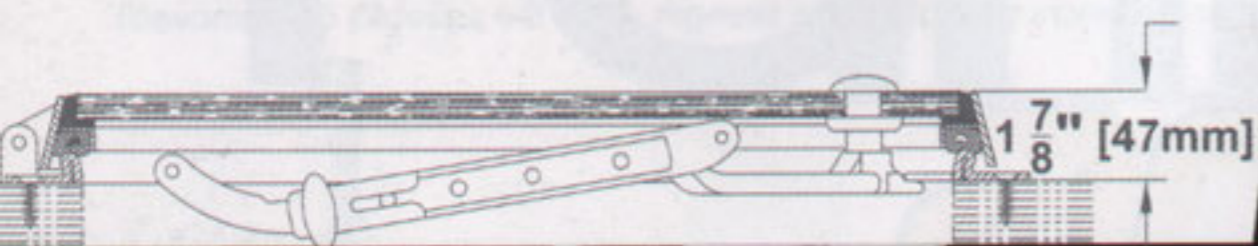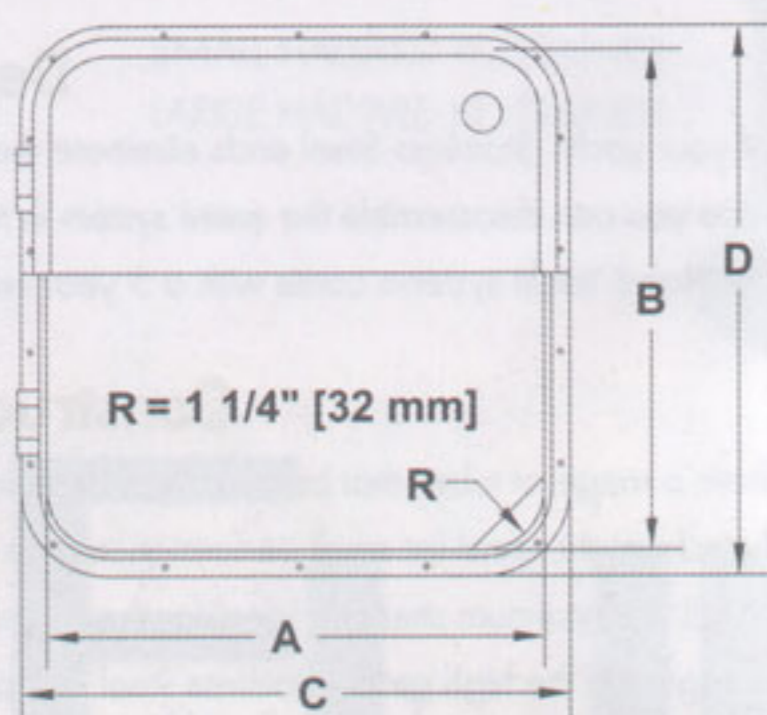

Hatches

TRADITIONAL

INSIDE OPENING (IN/OUTSIDE OPENING AND DOUBLE OPENING AVAILABLE)

| Part No. | SIZE | CUTOUT SIZE | | OVERALL | | ACRYLIC THICKNESS | WEIGHT |
|------------|-------------------|-----------------|-----------------|-----------------|-----------------|-------------------|--------|
| | | A | B | C | D | | |
| H6530-08-I | 8 1/2" x 13 3/4" | 8 1/2" - 206mm | 13 3/4" - 349mm | 10 5/8" - 270mm | 16 1/4" - 413mm | 5/16" - 8mm | 4.2KG |
| H6530-10-I | 10" x 10" | 10" - 254mm | 10" - 254mm | 12 1/2" - 318mm | 12 1/2" - 318mm | 5/16" - 8mm | 4.2KG |
| H6530-20-I | 12 1/2" x 17 1/2" | 12 1/2" - 318mm | 17 1/2" - 444mm | 15" - 382mm | 20" - 508mm | 1/2" - 12mm | 7.6KG |
| H6530-30-I | 14 1/2" x 19 1/2" | 14 1/2" - 369mm | 19 1/2" - 495mm | 17" - 433mm | 22" - 559mm | 1/2" - 12mm | 8.6KG |
| H6530-40-I | 16 1/2" x 16 1/2" | 16 1/2" - 419mm | 16 1/2" - 419mm | 19" - 483mm | 19" - 483mm | 1/2" - 12mm | 8.3KG |
| H6530-50-I | 19 1/2" x 19 1/2" | 19 1/2" - 495mm | 19 1/2" - 495mm | 22" - 559mm | 22" - 559mm | 1/2" - 12mm | 10.8KG |
| H6530-60-I | 24" x 24" | 24" - 610mm | 24" - 610mm | 26 1/2" - 674mm | 26 1/2" - 674mm | 1/2" - 12mm | 13.8KG |
| H6530-70-I | 31" x 31" | 31" - 788mm | 31" - 788mm | 33 1/2" - 852mm | 33 1/2" - 852mm | 1/2" - 12mm | 20.6KG |